




STEAM

## STEAM CLEANER

Model		Det Water 24/7 E	Base
Boiler		Stainless-steel AISI 304 with interchangeable heating elemen	nt
Body		Stainless-steel AISI 304 BA	
Power supply	V - Hz	1~ 230 - 50/60	
Boiler output	kW/h	2,4	
Maximum output	kW/h	2,45	
Boiler volume	I	1,5	3
Operating pressure	bar	8	6
Water tank	I	3	-
Detergent tank	I	1	-
Steam production	g/min	64	
	Kg/h	3,8	
Steam temperature	° C	174	165
Detergent temperature	° C	90 - 160	-
VARIOUS			
Weight	Kg	16	
Cable	m	5	
Dimensions (generator)	cm	H.32,6 x L.27,8 x W. 43,6	
Dimensions (pallet)	cm	53 x 40 x 52	
Pallet/unit	pz	24	





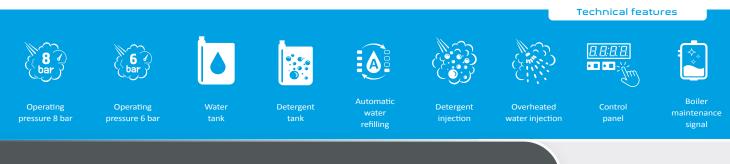

## Steam cleaner designed for professional use with stainless-steel body and boiler:

- $\cdot~$  Able to deliver dry saturated steam 174° or 165°C
- Available with detergent injection or overheated water injection
- The ergonomic structure, the fully electric operation and the compact size allows its to usage in any environment.
- All steam cleaner functions can be managed on the electronic control panel.
- Equipped with cable holder and anti-scratch 360° swivel front wheels.



- en

Evo 304

2,45<sup>kW</sup>

I/AD





## EVO 304 APPLICATIONS





