

Steam Power Plus

17,8^{kW} - 18,4^{kW} - 21^{kW} - 21,6^{kW} - 35,8^{kW} - 39,4^{kW}

STEAM CLEANER

Boiler	Stainless-steel AISI 304 with interchangeable heating elements							
Body	Stainless-steel AISI 304 BA							
Power supply	V - Hz	3~ 400 - 50 (60Hz on request)						
Boiler output	kW/h	10,8	14,4	18	21,6	28,8	36	
Maximum output	kW/h	17,8	18,4	21	21,6	35,8	39,4	
Boiler volume	l	13						
Operating pressure	bar	from 1 to 10						
Water tank	l	14						
Detergent tank	l	14						
Steam production	g/min	291	388	485	582	776	970	
	Kg/h	17,5	23	29,1	35	46,5	58	
Steam temperature	°C	165 - 183						
Detergent temperature	°C	90 - 160						

HIGH PRESSURE WATER MODULE

Motor output	kW/h	4
Water flow	l/min	13
Operating pressure	bar	from 0 to 150

VACUUM CLEANER

Power output	kW/h	3
Drum capacity	l	14 43
Air flow	m ³ /h	320
Depression	mm	3200

VARIOUS

Weight	Kg	180
Cable	m	8
Dimensions (generator)	cm	H.166 x L.69 x W. 95,5 drum 43l
Dimensions (pallet)	cm	120x80x165
Pallet/unit	pz	1



Stainless-steel

Technical features

Operating pressure 10 bar	Water pressure 150 bar	Water mains	Water & detergent tanks	Automatic water refilling	Detergent injection	Overheated water injection	Power regulation switch	Steam pressure regulation	Water pressure regulation	Control panel	Induction turbine	Boiler maintenance signal

Steam cleaner with stainless-steel body and boiler, designed for industrial use and able to deliver dry saturated steam at 183° C and high-pressure water up to 150 bar:

- Equipped with a wet/dry vacuum cleaner with an induction turbine and drainage pipe.
- A sturdy structure, a fully electric operation and the compact size allows its a usage in any environment, both outdoors (watertight protection IPX5) and indoors (e.g. in production lines).
- All steam cleaner functions can be managed on the electronic control panel.
- Equipped with accessories basket, double hose holder, lance holder, cable holder and front 360° swivel wheels with safety brakes.



Features

Wet/dry industrial vacuum cleaner (3kW) with induction turbine: 14 l - 43 l



Detergent tank - 14 liters



- High pressure pump level indicator
- Detergent tank level indicator
- Hose holder
- Geyser lance holders

Pump pressure regulator and pressure gauge



Steam outlet 12P and high pressure water outlet



Dimension



STEAM POWER
Version with steam and high pressure washer



Vacuum inlet

Drain hose

Water tank 14 liters



- Water tank level indicator
- Hose holder & accessories basket
- Cable holder



Water mains connection



Electric plugs - 8m:


- IEC309/16A Mod. 10,8 kW
- IEC309/32A Mod. 14,4 - 18 - 21,6 kW
- IEC309/63A Mod. 28,8 - 36 kW

Anti-scratch rubber wheels 360° and safety brakes



CONTROL PANEL

- Display to visualize temperature and pressure levels, working hours and boiler cleaning signal
- Steam flow and pressure regulation
- Buttons and indicators for the complete control of the parameters of the steam cleaner

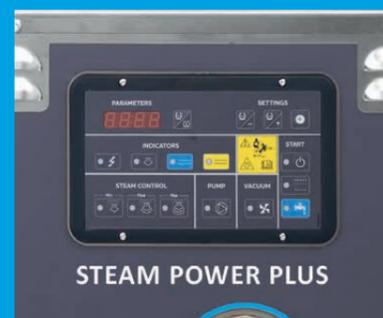

Optional accessories

Steam Power Plus can be used with the following accessories:

GEYSER 1 10bar Steam accessories




GEYSER 2 10bar/150bar Steam/water accessories



RADAMES 10bar Steam/vacuum accessories





FOOD
INDUSTRY



MECHANICAL
INDUSTRY



TRASPORT
INDUSTRY



CONVEYOR
BELT

